


# MTC3752T3

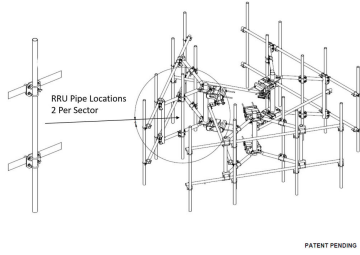

G2 Series High Capacity Three Sector Frame, 12.5 ft face, includes twelve 96 in antenna pipes plus six 96 in RRU Pipes; For patents, see [www.cs-pat.com](http://www.cs-pat.com).

## Product Classification

**Product Type** High capacity Tower sector frame

## General Specifications

**Application** 4G LTE antenna/radio mount  
**Mounting** Angle 60°, 203.2 mm (8 in) | Straight or tapered legs up to 203.2 mm (8 in) OD  
**Patent Number** Patent pending  
**Pipe, quantity** 18  
**Tower Taper** Non-tapered | Tapered

## Dimensions

**Height** 2,438.4 mm | 96 in  
**Face Width** 3.81 m | 12.5 ft  
**Pipe Length** 2,438.4 mm | 96 in  
**Face Support Pipe Diameter** 60.96 mm | 2.4 in  
**Mounting Diameter, maximum** 218.44 mm | 8.6 in  
**Mounting Diameter, minimum** 50.8 mm | 2 in  
**Pipe Outer Diameter** 60.96 mm | 2.4 in  
**Stand-off Distance** 1,092.2 mm | 43 in

## Material Specifications

**Material Type** Hot dip galvanized steel

## Mechanical Specifications

**Wind Rating** For Specifications, please contact [steelproducts@commscope.com](mailto:steelproducts@commscope.com) or call 800-255-1479  
**Wind Rating Test Method** TIA/EIA-222-G

# MTC3752T3

---

## Environmental Specifications

**Man Rating** 500 lb vertical man load at 15 mph (BWS)

## Packaging and Weights

**Included** Frame | Pipe mounts | Plain end pipes (12) | RRU Pipes (6) | Stiff arm | Tower attachment

**Packaging quantity** 1

**Weight, net** 808.755 kg | 1783 lb

## Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system



## \* Footnotes

**Man Rating** BWS—w Base Wind Speed

**Wind Rating** BWS—w Base Wind Speed; FBC—Florida Building Code