

# T-50-UW-43-M

Termination Load, 0–6000 MHz

## Product Classification

**Product Type** Termination load

## General Specifications

**Device Type** Termination Load

**Interface** 4.3-10 Male

**Color** Black

## Electrical Specifications


**Operating Frequency Band** 0 – 6000 MHz

**Average Power, maximum** 50 W

**Impedance** 50 ohm

**VSWR** 1.20

## Derating Curve

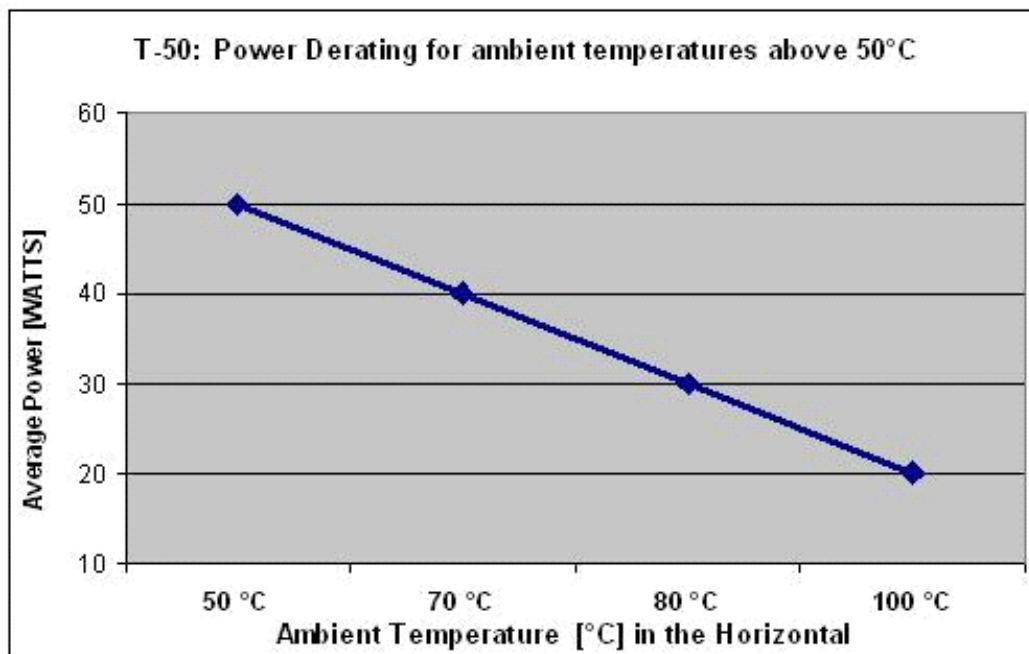

## Mechanical Specifications

**Inner Contact Plating** Silver

# T-50-UW-43-M

---

**Outer Contact Plating** Trimetal

## Environmental Specifications

**Application** Indoor/Outdoor  
**Ingress Protection Test Method** IEC 60529:2001, IP65  
**Operating Temperature** -25 °C to +50 °C (-13 °F to +122 °F)  
**Relative Humidity** Up to 100%

## Dimensions

**Height** 50.00 mm | 1.97 in  
**Length** 125.00 mm | 4.92 in  
**Width** 50.00 mm | 1.97 in  
**Net Weight** 0.37 kg | 0.82 lb

## Packed Dimensions

**Height** 58.0 mm | 2.3 in  
**Length** 158.0 mm | 6.2 in  
**Width** 78.0 mm | 3.1 in  
**Shipping Weight** 0.42 kg | 0.93 lb

## Regulatory Compliance/Certifications

Agency	Classification
RoHS 2011/65/EU	
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

