

# DPJ10-210-35F




HELIAX® FiberFeed® Remote Radio Head Power Y-Cable, OVP Top Enclosure End: one Red and one Black 10 AWG Conductors. RRU end: 2x10 AWG power cords with 1 Red and 1 Black conductors per cord. RRU length 2 feet, OVP length 25 feet

## Product Classification

<b>Portfolio</b>	CommScope®
<b>Product Series</b>	PWRT
<b>Regional Availability</b>	North America

## Cross Section Drawing

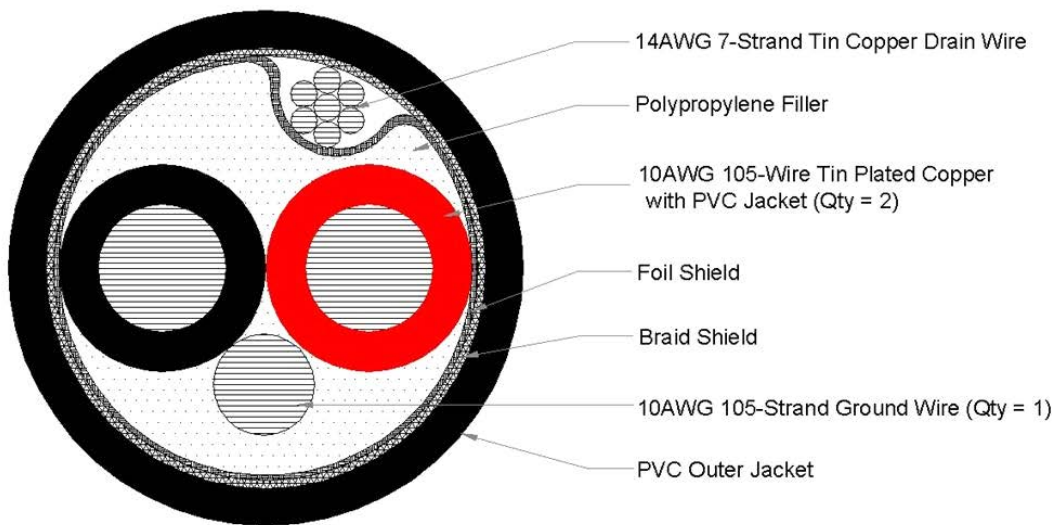

## General Specifications

<b>Ordering Note</b>	CommScope® non-standard product
----------------------	---------------------------------

## Construction Materials

<b>Construction Type</b>	Non-armored
<b>Conductor Material</b>	Tinned copper
<b>Dielectric Material</b>	PVC
<b>Drain Wire Material</b>	Tinned copper
<b>Filler Material</b>	Polypropylene
<b>Ground Wire Material</b>	Tinned copper
<b>Insulation Material, singles</b>	PVC
<b>Jacket Material</b>	PVC
<b>Outer Shield (Braid) Coverage</b>	65 %

# DPJ10-210-35F

<b>Outer Shield (Braid) Gauge</b>	36 AWG
<b>Outer Shield (Braid) Material</b>	Tinned copper
<b>Outer Shield (Tape) Material</b>	Aluminum/Poly, non-bonded

## Dimensions

<b>Cable Length</b>	8 m   27 ft
<b>Cable Weight</b>	202.00 lb/kft
<b>Diameter Over Jacket, nominal</b>	12.395 mm   0.488 in

## Environmental Specifications

<b>Environmental Space</b>	UV resistant for outdoor and/or direct burial installations
<b>Operating Temperature</b>	-40 °C to +90 °C (-40 °F to +194 °F)
<b>Safety Standard</b>	NEC Article 336 (Type TC)

## General Specifications

<b>Cable Type</b>	Power
<b>Jacket Color</b>	Black
<b>Supported Application</b>	Industrial
<b>Construction Type</b>	Discrete power cable

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

