



Innovative **Technology**
for a **Connected** World



OC69271

698-960 MHz/1710-2700 MHz

LTE Direct Mount Omnidirectional Antenna

MULTI-BAND DIRECT MOUNT OMNIDIRECTIONAL ANTENNA

The OC69271 antenna is a wide band omnidirectional antenna covering the domestic LTE700/Cellular/PCS/AWS/MDS, WiMAX 2300/2500, and global GSM900/GSM1800/UMTS/LTE2600 bands. The antenna can be used in both indoor and outdoor applications. It comes complete with mast mounting hardware and includes a UV stable radome enclosure that provides years of use without degradation to either mechanical properties or aesthetics.

FEATURES

- Applicable for both 3G and 4G solutions
- Domestic LTE 700 band and Global LTE 2600 band
- Domestic Cellular and Global GSM
- WiMAX 2300/2500/2600
- Weatherproof UV stable radome
- Mast mounting hardware included

MARKETS

- Broadband wireless access service provider
- Campus, healthcare, or transportation terminals
- Stadium, industrial plants, and processing stations
- Low-to-medium density, tower mounted rural locations
- Public Safety Radio

PARAMETER	SPECIFICATION
Frequency	698 to 960 MHz, 1710 to 1990 MHz, 1920 to 2170 MHz, 2100 to 2500 MHz, 2500 to 2690 MHz
Gain	698 to 960 MHz - 1.5 dBi, 1710 to 2700 MHz - 3.5 dBi
Average Efficiency	698 to 960 MHz - 76%, 1710 to 2700 MHz - 87%
3 dB Beamwidth - E-plane	698 to 960 MHz - 81°, 1700 to 2200 MHz - 75°, 2500 to 2700 MHz - 100°
3 dB Beamwidth - H-plane	360°, Omnidirectional
Polarization	Linear, Vertical
Nominal Impedance	50 Ohms
VSWR	698 to 960 MHz - <2.5:1, 1710 to 2690 MHz - <2.0:1
Power	10 watts
RF Connector	N-type (M or F)
Mount Style	Mast/pole mount
Radome	Polycarbonate, UV, White
Material Substance Compliance	ROHS Compliant
Operating Temperature	-30°C to +70°C
Storage Temperature	-40°C to +85°C
Dimensional (H x OD)	248 x 24.5 mm (9.8" x 1")
Weight	156 g

CONNECTORS

MODEL NUMBER	CONNECTOR
OC69271-FNM	Type N male
OC69271-FNF	Type N female

All antennas carry a 1-Year Warranty

global solutions: local support™

Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com


Europe: +1.32.80.7866.12
IAS-EUSales@lairdtech.com

Asia: +1.65.6.243.8022
IAS-AsiaSales@lairdtech.com

www.lairdtech.com


698-960 MHz/1710-2700 MHz LTE Direct Mount Omnidirectional Antenna

TYPICAL RADIATION PATTERNS

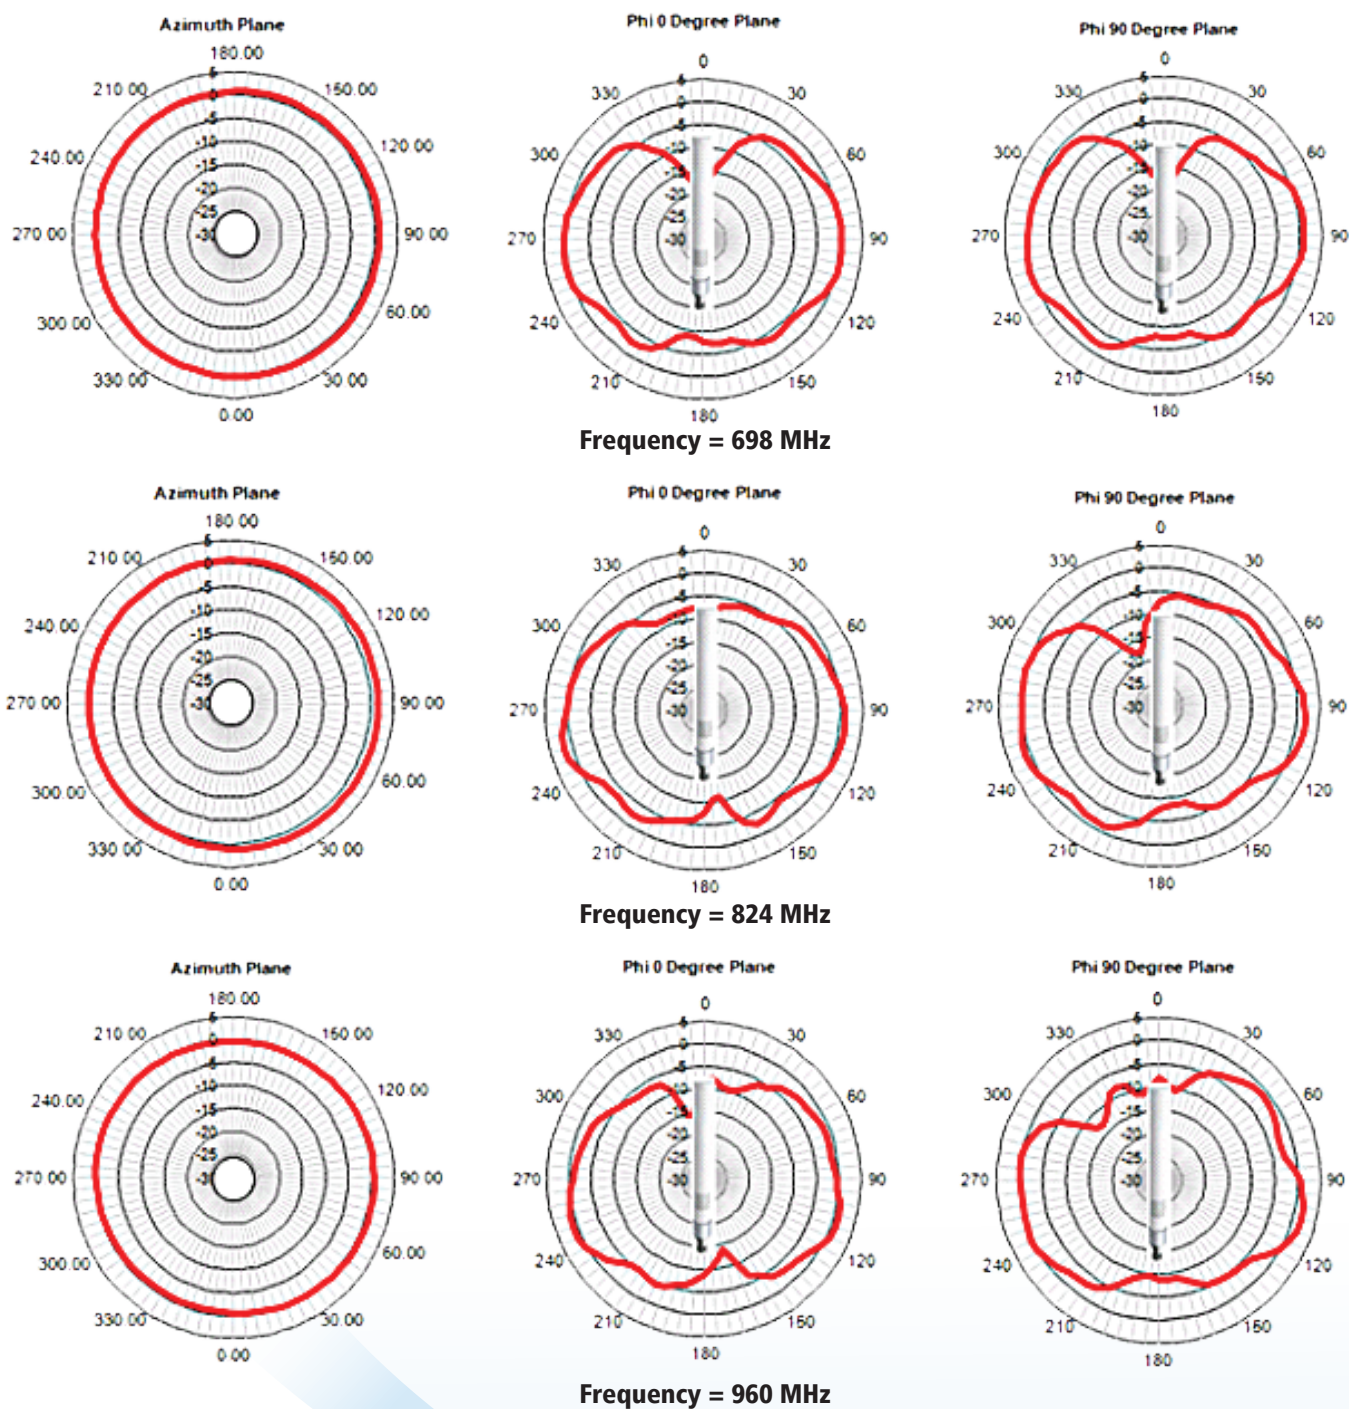

698-960 MHz/1710-2700 MHz LTE Direct Mount Omnidirectional Antenna

TYPICAL RADIATION PATTERNS

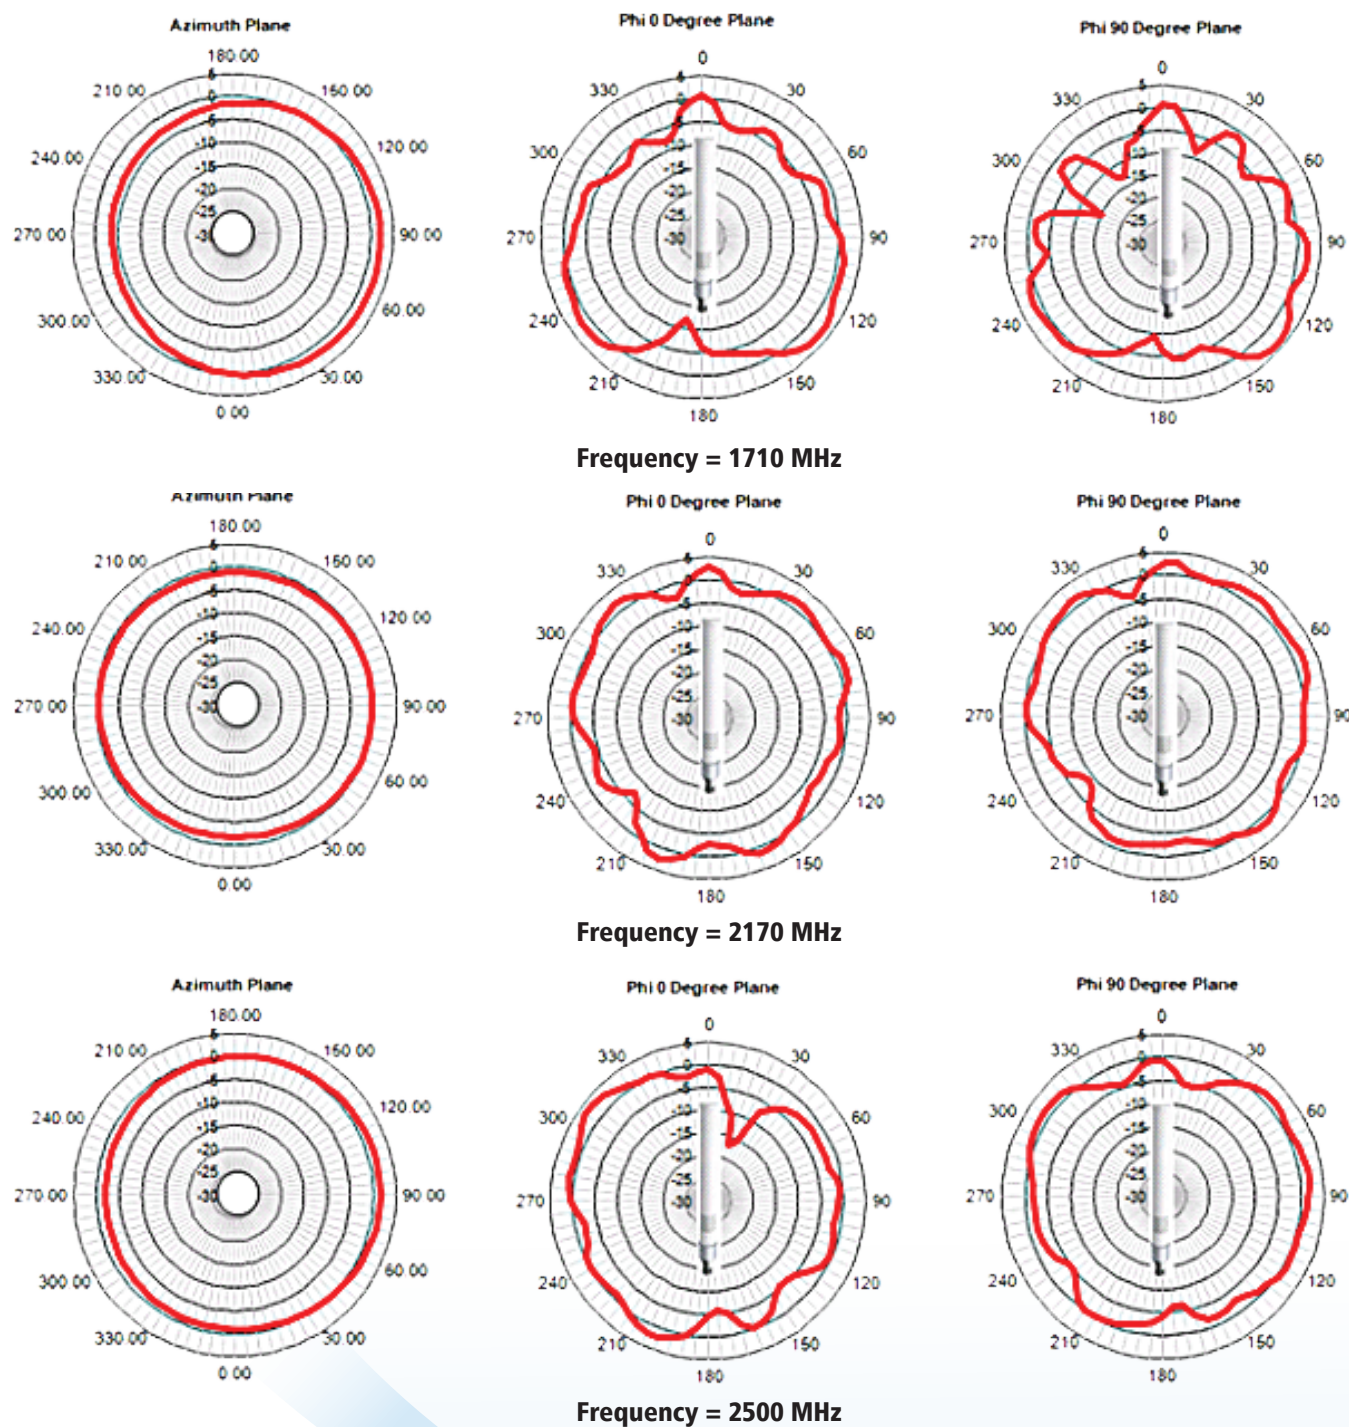




Innovative Technology
for a Connected World

OC69271

698-960 MHz/1710-2700 MHz

LTE Direct Mount Omnidirectional Antenna

TYPICAL RADIATION PATTERNS

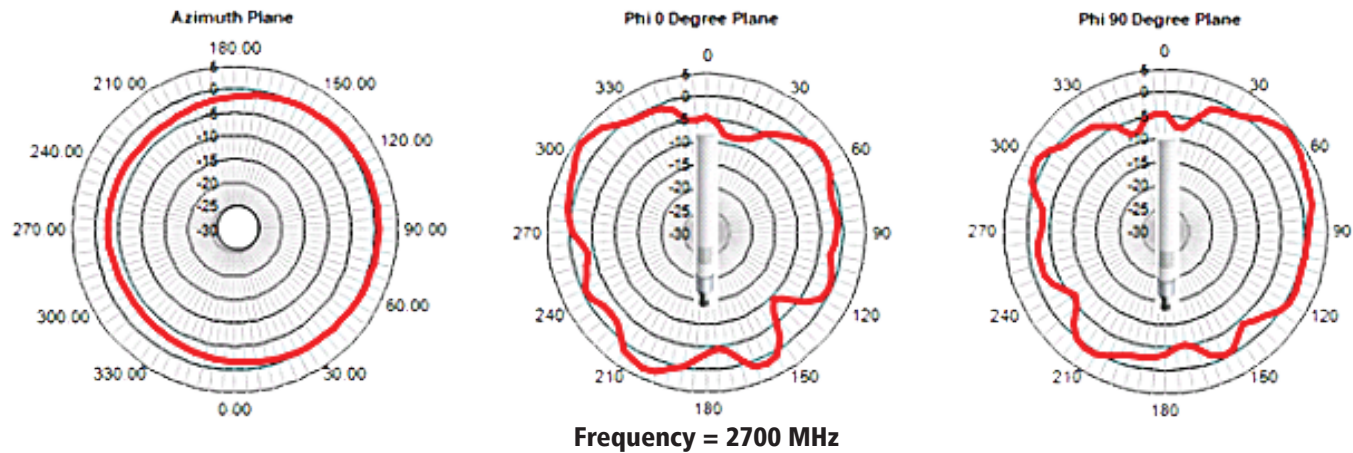

ANT-DS-OC69271 1012

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. Responsibility for the use and application of Laird Technologies materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2012 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trade marks or registered trade marks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.