


RRZZVVT4S4-65D-R8



28-port sector antenna, 4x 694–960, 4x 1427–2690 and 4x 1695–2690 MHz 65° HPBW, 8x 2300–2690 and 8x 3300–3800MHz, 90° HPBW, 8x RET

- Includes two planar arrays with separate calibration ports for each array for use in beamforming systems covering all TDD bands
- Optimized for software defined split six sector applications
- Eight internal RETs control the antenna arrays
- 4 M-LOC cluster connectors for the two planar beamforming arrays

General Specifications

Antenna Type	Sector
Band	Multiband
Calibration Connector Interface	M-LOC
Calibration Connector Quantity	2
Color	Light Gray (RAL 7035)
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage
Radome Material	Fiberglass, UV resistant
Radiator Material	Low loss circuit board
Reflector Material	Aluminum
RF Connector Interface	4.3-10 Female M-LOC
RF Connector Location	Bottom
RF Connector Quantity, high band	24
RF Connector Quantity, mid band	0
RF Connector Quantity, low band	4
RF Connector Quantity, total	28

Remote Electrical Tilt (RET) Information

RET Hardware	CommRET v2
RET Interface	8-pin DIN Female 8-pin DIN Male
RET Interface, quantity	2 female 2 male
Input Voltage	10–30 Vdc


RRZZVVT4S4-65D-R8

Internal RET	High band (6) Low band (2)
Power Consumption, idle state, maximum	1 W
Power Consumption, normal conditions, maximum	8 W
Protocol	3GPP/AISG 2.0 (Single RET)

Dimensions

Width	498 mm 19.606 in
Depth	197 mm 7.756 in
Length	2688 mm 105.827 in
Net Weight, antenna only	59.4 kg 130.954 lb

Array Layout

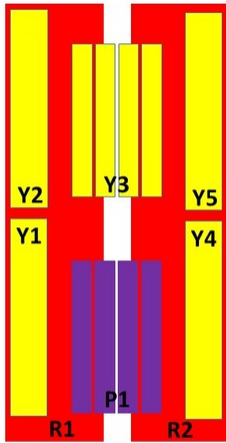


Array	Freq (MHz)	Conns	RET(sRET)	AISG RET UID
R1	694-960	1-2	1	CPxxxxxxxxxxxxR1
R2	694-960	3-4	2	CPxxxxxxxxxxxxR2
Y1	1427-2690	5-6	3	CPxxxxxxxxxxxxY1
Y2	1695-2690	7-8	4	CPxxxxxxxxxxxxY2
Y3	2300-2690	9-16	5	CPxxxxxxxxxxxxY3
Y4	1427-2690	17-18	6	CPxxxxxxxxxxxxY4
Y5	1695-2690	19-20	7	CPxxxxxxxxxxxxY5
P1	3300-3800	21-28	8	CPxxxxxxxxxxxxP1

Left Right
Bottom

(Sizes of colored boxes are not true depictions of array sizes)

Port Configuration

RRZZVVT4S4-65D-R8

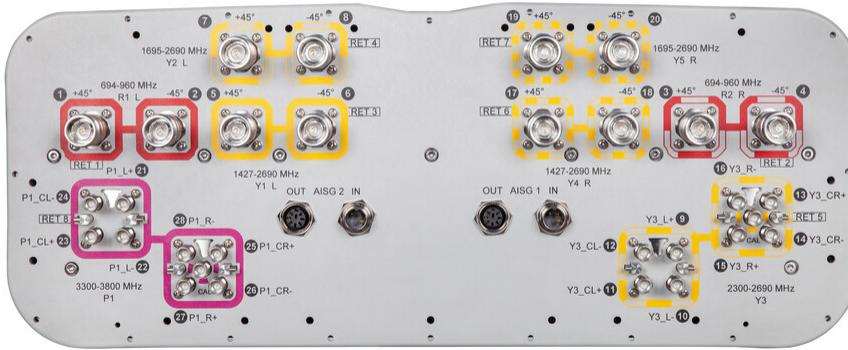

Electrical Specifications

Impedance	50 ohm
Operating Frequency Band	1427 – 2690 MHz 1695 – 2690 MHz 2300 – 2690 MHz 3300 – 3800 MHz 694 – 960 MHz
Polarization	±45°
Total Input Power, maximum	1,900 W @ 50 °C

Electrical Specifications

	R1,R2	R1,R2	R1,R2	Y1,Y2,Y4,Y5	Y1,Y2,Y4,Y5	Y1,Y4	Y3	P1
Frequency Band, MHz	694–790	790–890	890–960	1695–2180	2300–2690	1427–1518	2300–2690	3300–3800
RF Port	1-4	1-4	1-4	5-8,17-20	5-8,17-20	5,6,17,18	9-16	21-28
Gain, dBi	15.7	16	16.1	16.8	17.8	14.9	16.3	15.9
Beamwidth, Horizontal, degrees	72	66	63	70	60	79	90	89
Beamwidth, Vertical, degrees	8.8	7.8	7.2	7.1	5.5	9.2	4.8	6.5
Beam Tilt, degrees	2–12	2–12	2–12	2–12	2–12	2–12	2–12	2–12
USLS (First Lobe), dB	17	19	23	21	23	25	19	16
Front-to-Back Ratio at 180°, dB	34	30	29	32	31	35	31	29
Coupling level, Amp, Antenna							26	26

RRZZVVT4S4-65D-R8

port to Cal port, dB

Coupling level, max Amp Δ, Antenna port to Cal port, dB ±2 ±2

Coupler, max Amp Δ, Antenna port to Cal port, dB 0.9 0.9

Coupler, max Phase Δ, Antenna port to Cal port, degrees 7 9

Isolation, Cross Polarization, dB 28 28 28 25 25 25 25 25

Isolation, Inter-band, dB 28 28 28 25 25 25 28 28

Isolation, Co-polarization, dB 20 20

VSWR | Return loss, dB 1.5|14.0 1.5|14.0 1.5|14.0 1.5|14.0 1.5|14.0 1.5|14.0 1.5|14.0 1.5|14.0

PIM, 3rd Order, 2 x 20 W, dBc -150 -150 -150 -150 -150 -150 -150 -145

Input Power per Port at 50°C, maximum, watts 300 300 300 250 200 250 150 75

Electrical Specifications, Broadcast 65°

Frequency Band, MHz **2300–2690 3300–3800**

Gain, dBi 17.4 16.4

Beamwidth, Horizontal, degrees 59 60

Beamwidth, Vertical, degrees 4.8 6.5

Front-to-Back Total Power at 180° ± 30°, dB 28 24

USLS (First Lobe), dB 18 16

Electrical Specifications, Service Beam

Frequency Band, MHz **2300–2690 3300–3800**

Steered 0° Gain, dBi 21.2 20.3

Steered 0° Beamwidth, Horizontal, degrees 25 24

Steered 0° Front-to-Back Total Power at 180° ± 30°, dB 32 28

Steered 0° Horizontal Sidelobe, dB 13 12

Steered 30° Gain, dBi 20.4 19.7

Steered 30° Beamwidth, Horizontal, degrees 29 27

Steered 30° Front-to-Back 31 27

RRZZVVT4S4-65D-R8

Total Power at 180° ± 30°, dB

Electrical Specifications, Soft Split

Frequency Band, MHz	2300–2690	3300–3800
Gain, dBi	20.2	19.5
Beamwidth, Horizontal, degrees	32	30
Front-to-Back Total Power at 180° ± 30°, dB	33	29
Horizontal Sidelobe, dB	21	16

Mechanical Specifications

Effective Projective Area (EPA), frontal	1 m ² 10.764 ft ²
Effective Projective Area (EPA), lateral	0.35 m ² 3.767 ft ²
Wind Loading @ Velocity, frontal	1,070.0 N @ 150 km/h (240.5 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	375.0 N @ 150 km/h (84.3 lbf @ 150 km/h)
Wind Loading @ Velocity, maximum	1,385.0 N @ 150 km/h (311.4 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	880.0 N @ 150 km/h (197.8 lbf @ 150 km/h)
Wind Speed, maximum	241 km/h (150 mph)

Packaging and Weights

Width, packed	565 mm 22.244 in
Depth, packed	309 mm 12.165 in
Length, packed	2935 mm 115.551 in
Weight, gross	80.4 kg 177.251 lb

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.andrew.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant/Exempted



RRZZVVT4S4-65D-R8

Included Products

- BSAMNT-4 – Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.
- BSAMNT-M4 – Middle Downtilt Mounting Kit for Long Antennas for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor bracket set.

* Footnotes

Performance Note Severe environmental conditions may degrade optimum performance